


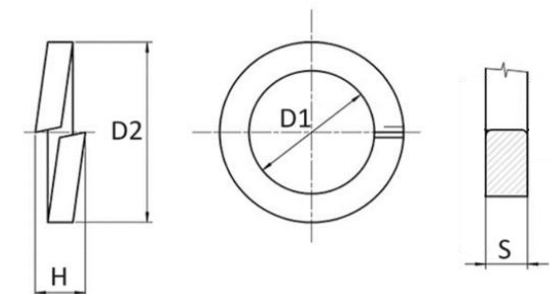


<b>W</b>	<b>WASHER</b>	<b>Part Number Designation</b>		
		<b>WSL-D7980</b>	<b>- M3</b>	<b>- ZI</b>
<b>WSL-D7980</b>	<b>WASHER - SPRING LOCK- DIN7980</b>	 <b>Type</b>	 <b>Bolt Thread</b>	 <b>Material</b>
<h1>Metric DIN7980 Spring Split Lock Washer</h1>		<b>WSL-D7980</b>		

Unit: mm

Bolt		Type	Inside Diameter (D1)	Outside Diameter (D2 Max )	Washer Thickness ( S )	Height (H)	Material	
Size	Thread	Spring Lock - DIN7980					Symbol	Stand for
3	M3	<b>WSL-D7980</b>	3.1 - 3.4	5.6	1.0 ±0.1	2.00 - 2.36	SS	304/A2/18-8 Stainless Steel
3.5	M3.5		3.6 - 3.9	6.1	1.0 ±0.1	2.00 - 2.36		
4	M4		4.1 - 4.4	7.0	1.2 ±0.1	2.40 - 2.83	SCR	316/A4 Stainless Steel
5	M5		5.1 - 5.4	8.8	1.6 ±0.1	3.20 - 3.78		
6	M6		6.4 - 6.5	9.9	1.6 ±0.1	3.20 - 3.78	BOS	Black Oxide Steel
8	M8		8.1 - 8.5	12.7	2.0 ±0.1	4.00 - 4.72		
10	M10		10.2 - 10.7	16.0	2.5 ±0.15	5.00 - 5.90	ZI	Zinc Plated Steel
12	M12		12.2 - 12.7	18.0	2.5 ±0.15	5.00 - 5.90		
14	M14		14.2 - 14.7	21.1	3.0 ±0.2	6.00 - 7.10		
16	M16		16.2 - 17.0	24.4	3.5 ±0.2	7.00 - 8.25		

**VXA010624**