


CS	CAP SCREW	Part Number Designation					
		CSBS-F	-	M3	-	6.0	-
CSBS	CAP SCREW - BUTTON SOCKET HEAD	↓ Type	↓ Thread Code	↓ Length	↓ Material		

ISO 7380-2 Hexagonal Button Socket Head Cap Screw with Flange

CSBS-F

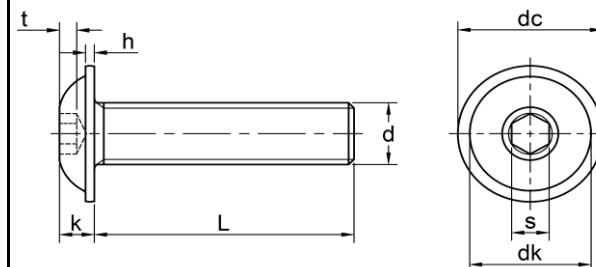

Unit: mm

Thread size	Thread code (d)	Type With Flange	Head						Material	
			Diameter (dk) With Flange	Diameter Flange (dc)	Height (k)	Thickness (h)	Drive size (s) ref	Depth (t) min	Symbol	Stand for
M3x0.5	M3	CSBS-F	4.9 - 5.2	6.32 - 6.90	1.40 - 1.65	0.55 - 0.70	2.0	1.04	SS	304/A2/18-8 Stainless Steel
M4x0.7	M4		6.8 - 7.2	8.82 - 9.40	1.95 - 2.20	0.65 - 0.80	2.5	1.30		
M5x0.8	M5		8.4 - 8.8	11.10 - 11.80	2.50 - 2.75	0.80 - 1.00	3.0	1.56	Z110	Class 10 Steel Zinc Plated
M6x1.0	M6		9.6 - 10.0	12.90 - 13.60	3.00 - 3.30	1.00 - 1.20	4.0	2.08		
M8x1.25	M8		12.8 - 13.2	17.10 - 17.80	4.10 - 4.40	1.25 - 1.50	5.0	2.60	Z110B	Class 10 Steel Black Zinc Plated
M10x1.5	M10		16.1 - 16.5	21.06 - 21.90	5.20 - 5.50	1.70 - 2.00	6.0	3.12		
M12x1.75	M12		18.9 - 19.4	25.16 - 26.00	6.24 - 6.60	2.10 - 2.40	8.0	4.16		
M16x2.0	M16		25.5 - 26.0	33.00 - 34.00	8.44 - 8.80	2.50 - 2.80	10.0	5.20		
Length (L)	6.0 ± 0.24	8.0 ± 0.29	10.0 ± 0.29	12.0 ± 0.35	16.0 ± 0.35	20.0 ± 0.42	25.0 ± 0.42			
	30.0 ± 0.42	35.0 ± 0.5	40.0 ± 0.5	45.0 ± 0.5	50.0 ± 0.5	55.0 ± 0.6	60.0 ± 0.6			
	65.0 ± 0.6	70.0 ± 0.6	80.0 ± 0.6	90.0 ± 0.7	100.0 ± 0.7			VXA010624	