


SLOTTED-HEAD CAPTIVE PANEL SCREWS

Ốc vít bằng điện Slotted-Head Captive Panel Screws

PFC2, PFS2

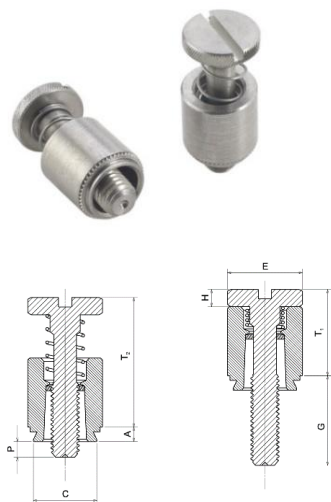

Part Number Designation			
PFS2	832	50	CN
↓	↓	↓	↓
Type and Material	Thread Size Code	Screw Length Code	Finish Code

ALL DIMENSION ARE IN MILLIMETERS

METRIC	Thread Size x Pitch	Type		Thread code	Screw Length Code	A (Shank) Max.	Min sheet Thickness	Hole size In Sheet +0.08	C Max.	E ±0.25	G ±0.4	H ±0.13	P ±0.64	T1 Max.	T2 Nom.	Min. Dist. Hole C/L To Edge
		Steel	Stainless Steel													
	M3x0.5	PFS2	PFC2	M3	40	1.53	1.53	6.73	6.71	7.92	6.4	1.83	0	9.14	13.72	6.35
					62						9.5		3.2			
	M4x0.7	PFS2	PFC2	M4	50	1.53	1.53	7.92	7.9	9.53	7.9	2.08	0	11.43	17.53	7.87
					72						11.1		3.2			
					94						14.3		6.4			
	M5x0.8	PFS2	PFC2	M5	50	1.53	1.53	8.74	8.72	10.31	7.9	2.08	0	11.47	17.53	8.63
					72						11.1		3.2			
					94						14.3		6.4			
	M6x1	PFS2	PFC2	M6	60	1.53	1.53	10.49	10.47	11.89	9.5	2.46	0	14.73	22.35	9.65
					82						12.7		3.2			
					04						15.9		6.4			

ALL DIMENSION ARE IN INCHES

UNIFIED	Thread Size	Type		Thread code	Screw Length Code	A (Shank) Max.	Min sheet Thickness	Hole size In Sheet +.003 -.000	C Max.	E ±.010	G ±.016	H ±.005	P ±.025	T1 Max.	T2 Nom.	Min. Dist. Hole C/L To Edge
		Steel	Stainless Steel													
	.112-40 (#4-40)	PFS2	PFC2	440	40	.060	.060	.265	.264	.312	.250	.072	.000	.360	.540	.25
					62						.375		.125			
	.138-32 (#6-32)	PFS2	PFC2	632	40	.060	.060	.281	.280	.344	.250	.072	.000	.360	.540	.28
					62						.375		.125			
					84						.500		.250			
	.164-32 (#8-32)	PFS2	PFC2	832	50	.060	.060	.312	.311	.375	.312	.082	.000	.450	.690	.31
					72						.437		.125			
					94						.562		.250			
	.190-32 (#10-32)	PFS2	PFC2	032	50	.060	.060	.344	.343	.406	.312	.082	.000	.450	.690	.34
					72						.437		.125			
					94						.562		.250			
	.250-20 (1/4-20)	PFS2	PFC2	0420	60	.060	.060	.413	.412	.468	.375	.097	.000	.580	.880	.38
					82						.500		.125			
					04						.625		.250			