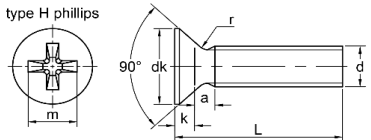
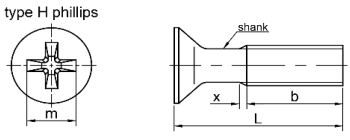
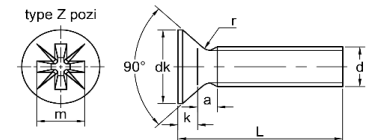
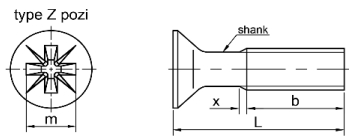


<b>MS</b>	<b>MACHINE SCREW</b>	<b>Part Number Designation</b>					
		<b>MSF-H</b> ↓ Type	<b>-</b>	<b>M3</b> ↓ Thread Code	<b>-</b>	<b>8.0</b> ↓ Length	<b>-</b>
<b>MSF</b>	<b>MACHINE SCREW - FLAT HEAD</b>						
<b>Metric DIN 965 Cross Recessed Flat Countersunk Machine Screws</b>		<b>MSF-H</b>		<b>MSF-SH</b>			
		<b>MSF-Z</b>		<b>MSF-SZ</b>			

Unit: mm

Thread size	Thread code (d)	Type				Head				Body			Material	
		Phillips H	Pozi Z	Shank Phillips H	Shank Pozi Z	Diameter (dk)	Key Width (m)	a Max	k Max	r Max	b Min	x Max	Symbol	Stand for
M1.6x0.35	M1.6	<b>MSF-H</b>	<b>MSF-Z</b>	<b>MSF-SH</b>	<b>MSF-SZ</b>	2.75 - 3.0	≈1.8	0.7	0.96	0.4	15	0.9	SS	304/A2/18-8 Stainless Steel
M2x0.4	M2					3.5 - 3.8	≈2.35	0.8	1.2	0.5	16	1.0		
M2.5x0.45	M2.5					4.4 - 4.7	≈2.7	0.9	1.5	0.7	18	1.1	SCR	316/A4 Stainless Steel
M3x0.5	M3					5.3 - 5.6	≈2.9	1	1.65	0.8	19	1.25		
M3.5x0.8	M3.5					6.14 - 6.5	≈3.9	1.2	1.93	0.95	20	1.5	ZI4	Class 4 Steel Zinc Plated
M4x0.7	M4					7.14 - 7.5	≈4.4	1.4	2.2	1	22	1.75		
M5x0.8	M5					8.84 - 9.2	≈4.6	1.6	2.5	1.3	25	2.0	ZI4B	Class 4 Steel Black Zinc Plated
M6x1.0	M6					10.57 - 11.0	≈6.6	2	3	1.6	28	2.5		
M8x1.25	M8					14.07 - 14.5	≈8.7	2.5	4	2	34	3.2		
M10x1.5	M10					17.57 - 18.0	≈9.6	3	5	2.5	40	3.8		
<b>Length (L)</b>		3.0 ± 0.2		10.0 ± 0.3		20.0 ± 0.4		35.0 ± 0.5		60.0 ± 1.0				
		4.0 ± 0.25		12.0 ± 0.35		22.0 ± 0.4		40.0 ± 0.5		-				
		5.0 ± 0.25		14.0 ± 0.35		25.0 ± 0.4		45.0 ± 0.5		-				
		6.0 ± 0.25		16.0 ± 0.35		28.0 ± 0.4		50.0 ± 0.5		-				
		8.0 ± 0.3		18.0 ± 0.35		30.0 ± 0.4		55.0 ± 1.0		100.0 ± 1.0		<b>VXA010624</b>		