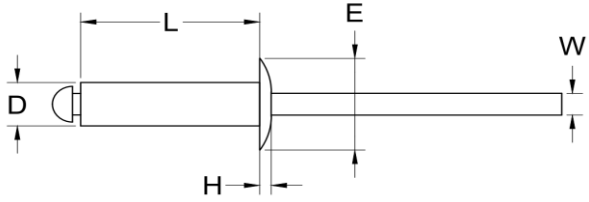


R	RIVET	Part Number Designation					
		RV-ODH	-	2.4	-	4.0	-
Open End Blind Rivet Dome Head		Type	Dimension	Length	Material		
RV-ODH							

Unit: mm

D	Grip Range (Min -Max)	Material		H	L +1/-0	E	W	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
2.4 +0.08 -0.1	0.5 - 2.0	Aluminum	Steel	1.0	4.0	4.2 - 5.0	1.55	AD 34 BS	A	Aluminum
	2.0 - 4.0				6.0				S	Steel
	4.0 - 6.0				8.0					
	6.0 - 8.0				10.0					
	7.0 - 9.5				12.0					
	8.0 - 11.5				14.0					
	10.0 - 13.0				16.0					
3.0 +0.08 -0.15	1.5 - 3.5	Aluminum	Steel	1.3	6.0	5.4 - 6.3	2.00			
	3.5 - 5.0				8.0					
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0					
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0					
	12.0 - 14.5				18.0					
3.2 +0.08 -0.15	1.0 - 3.5	Aluminum	Steel	1.3	6.0	5.8 - 6.7	2.00	AD 42 BS		
	3.5 - 5.0				8.0			AD 43 BS		
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0			AD 46 BS		
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0			AD 48 BS		
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
	15.0 - 21.0				25.0					
4.0 +0.08 -0.15	1.0 - 3.0	Aluminum	Steel	1.7	6.0	6.9 - 8.4	2.45	AD 52 BS		
	3.0 - 5.0				8.0			AD 53 BS		
	4.0 - 6.5				10.0			AD 54 BS		
	6.0 - 8.5				12.0					
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0			AD 58 BS		
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
	4.8 +0.08 -0.15				1.0 - 2.5			Aluminum	Steel	2.0
2.5 - 4.0		8.0								
4.0 - 6.0		10.0	AD 64 BS							
6.0 - 8.0		12.0								
8.0 - 10.0		14.0								
8.0 - 12.0		16.0								
10.0 - 14.0		18.0								
12.0 - 16.0		20.0	AD 610 BS							
16.0 - 21.0		25.0	AD 614 BS							
21.0 - 25.0		30.0	AD 616 BS							
25.0 - 30.0		35.0								
30.0 - 35.0		40.0								
35.0 - 40.0		45.0								
40.0 - 45.0	50.0									
5.0 +0.08 -0.15	1.0 - 2.5	Aluminum	Steel	2.1	6.0	8.7 - 10.5	2.95			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0					
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0					
	8.0 - 12.0				16.0					
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0					
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
40.0 - 45.0	50.0									

6.0 +0.08 -0.15	1.5 - 3.0	Aluminum	Steel	2.7	8.0	11.6 - 13.4	3.40	
	2.0 - 4.0				10.0			
	3.0 - 6.0				12.0			
	6.0 - 8.0				14.0			
	6.0 - 10.0				16.0			
	8.0 - 12.0				18.0			
	10.0 - 14.0				20.0			
	14.0 - 18.0				25.0			
	18.0 - 23.0				30.0			
	23.0 - 28.0				35.0			
	28.0 - 33.0				40.0			
6.4 +0.08 -0.15	1.5 - 3.0	Aluminum	Steel	2.7	8.0	11.6 - 13.4	3.90	
	2.0 - 4.0				10.0			
	3.0 - 6.0				12.0			AD 84 BS
	6.0 - 8.0				14.0			
	6.0 - 10.0				16.0			
	8.0 - 12.0				18.0			AD 88 BS
	10.0 - 14.0				20.0			
	14.0 - 18.0				25.0			AD 812 BS
	18.0 - 23.0				30.0			AD 816 BS
	23.0 - 28.0				35.0			
	28.0 - 33.0				40.0			