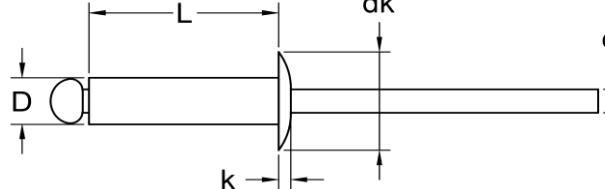
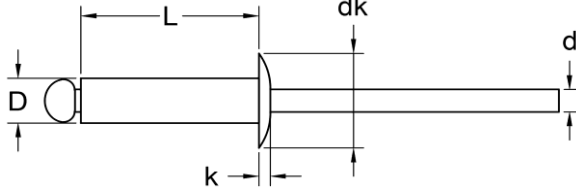


RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DH	-	K	-	3.2	-	5.0	-	8	-	AL
Open End - Dome Head														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Open End Blind Rivet Dome Head		RVBO-DH												

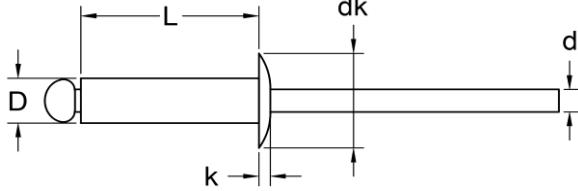
Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	1.0 - 3.5	Aluminum	Aluminum	1.3	6.0	5.8 - 6.7	2.1	AD 42 ABS	AL	Aluminum
	3.5 - 5.0				8.0			AD 43 ABS		
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0					
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0			AD 48 ABS		
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
	15.0 - 21.0				25.0					
4.0 +0.08 -0.15	1.0 - 3.0	Aluminum	Aluminum	1.7	6.0	6.9 - 8.4	2.5	AD 52 ABS		
	3.0 - 5.0				8.0			AD 53 ABS		
	4.0 - 6.5				10.0			AD 54 ABS		
	6.0 - 8.5				12.0					
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0			AD 58 ABS		
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0			AD 510 ABS		
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
4.8 +0.08 -0.15	1.0 - 2.5	Aluminum	Aluminum	2.0	6.0	8.3 - 10.1	3.0			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0			AD 64 ABS		
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0					
	8.0 - 12.0				16.0					
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0			AD 610 ABS		
	16.0 - 21.0				25.0			AD 614 ABS		
	21.0 - 25.0				30.0			AD 616 ABS		
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					

RB	RIVET BLIND	Part Number Designation												
Open End - Dome Head		RVBO	-	DH	-	K	-	3.2	-	5.0	-	8	-	ALSS
														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Open End Blind Rivet Dome Head		RVBO-DH												

Unit: mm

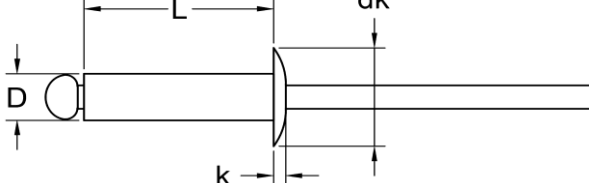
D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	1.0 - 3.5	Aluminum	Stainless Steel	1.3	6.0	5.8 - 6.7	2.00		AL	Aluminum
	3.5 - 5.0				8.0					
	5.0 - 7.0				10.0				SS	Stainless Steel
	7.0 - 9.0				12.0					
	9.0 - 11.0				14.0					
	12.0 - 14.5				16.0					
	13.0 - 16.5				18.0					
	15.0 - 21.0				20.0					
					25.0					
4.0 +0.08 -0.15	1.0 - 3.0	Aluminum	Stainless Steel	1.7	6.0	6.9 - 8.4	2.50			
	3.0 - 5.0				8.0					
	4.0 - 6.5				10.0					
	6.0 - 8.5				12.0					
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0					
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
4.8 +0.08 -0.15	1.0 - 2.5	Aluminum	Stainless Steel	2.0	6.0	8.3 - 10.1	3.00			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0					
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0					
	8.0 - 12.0				16.0					
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0					
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					

RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DH	-	K	-	2.4	-	4.0	-	6	-	ALZI
Open End - Dome Head														
Open End Blind Rivet Dome Head		RVBO-DH												

Unit: mm

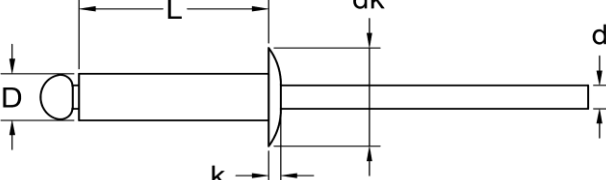
D	Grip Range (Min - Max)	Material		d	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
2.4 +0.08 -0.1	0.5 - 2.0	Aluminum	Steel	1.0	4.0	4.2 - 5.0	1.55		AL	Aluminum
	2.0 - 4.0				6.0					
	4.0 - 6.0				8.0			AD 34 BS	ZI	Steel
	6.0 - 8.0				10.0					
	7.0 - 9.5				12.0					
	8.0 - 11.5				14.0					
	10.0 - 13.0				16.0					
3.0 +0.08 -0.15	1.5 - 3.5	Aluminum	Steel	1.3	6.0	5.4 - 6.3	2.00			
	3.5 - 5.0				8.0					
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0					
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0					
	12.0 - 14.5				18.0					
3.2 +0.08 -0.15	13.0 - 16.5	Aluminum	Steel	1.3	20.0	5.8 - 6.7	2.00			
	1.0 - 3.5				6.0			AD 42 BS		
	3.5 - 5.0				8.0			AD 43 BS		
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0			AD 46 BS		
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0			AD 48 BS		
4.0 +0.08 -0.15	12.0 - 14.5	Aluminum	Steel	1.7	18.0	6.9 - 8.4	2.45			
	13.0 - 16.5				20.0					
	15.0 - 21.0				25.0					
	1.0 - 3.0				6.0			AD 52 BS		
	3.0 - 5.0				8.0			AD 53 BS		
	4.0 - 6.5				10.0			AD 54 BS		
	6.0 - 8.5				12.0					
4.8 +0.08 -0.15	7.0 - 10.5	Aluminum	Steel	2.0	14.0	8.3 - 10.1	2.95			
	8.0 - 12.5				16.0			AD 58 BS		
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0			AD 610 BS		
	25.0 - 30.0				35.0			AD 614 BS		
5.0 +0.08 -0.15	30.0 - 35.0	Aluminum	Steel	2.1	40.0	8.7 - 10.5	2.95	AD 616 BS		
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					
	1.0 - 2.5				6.0					
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0					
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0					
	8.0 - 12.0				16.0					
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0					
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					

6.0 +0.08 -0.15	1.5 - 3.0	Aluminum	Steel	2.7	8.0	11.6 - 13.4	3.40	
	2.0 - 4.0				10.0			
	3.0 - 6.0				12.0			
	6.0 - 8.0				14.0			
	6.0 - 10.0				16.0			
	8.0 - 12.0				18.0			
	10.0 - 14.0				20.0			
	14.0 - 18.0				25.0			
	18.0 - 23.0				30.0			
	23.0 - 28.0				35.0			
	28.0 - 33.0				40.0			
6.4 +0.08 -0.15	1.5 - 3.0	Aluminum	Steel	2.7	8.0	11.6 - 13.4	3.90	
	2.0 - 4.0				10.0			
	3.0 - 6.0				12.0			AD 84 BS
	6.0 - 8.0				14.0			
	6.0 - 10.0				16.0			
	8.0 - 12.0				18.0			AD 88 BS
	10.0 - 14.0				20.0			
	14.0 - 18.0				25.0			AD 812 BS
	18.0 - 23.0				30.0			AD 816 BS
	23.0 - 28.0				35.0			
	28.0 - 33.0				40.0			

RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DH	-	K	-	3.0	-	5.0	-	8	-	SS
Open End - Dome Head														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Open End Blind Rivet Dome Head		RVBO-DH												

Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.0 +0.08 -0.15	1.0 - 3.5	Stainless Steel	Stainless Steel	1.3	6.0	5.4 - 6.3	2.10		SS	Stainless Steel
	3.5 - 5.0				8.0					
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0					
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0					
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
3.2 +0.08 -0.15	1.0 - 3.5	Stainless Steel	Stainless Steel	1.3	6.0	5.8 - 6.7	2.10	SSD 42 SSBS		
	3.5 - 5.0				8.0			SSD 43 SSBS		
	5.0 - 7.0				10.0			SSD 45 SSBS		
	7.0 - 9.0				12.0			SSD 46 SSBS		
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0			SSD 48 SSBS		
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
4.0 +0.08 -0.15	1.0 - 3.0	Stainless Steel	Stainless Steel	1.7	6.0	6.9 - 8.4	2.60	SSD 52 SSBS		
	3.0 - 5.0				8.0			SSD 53 SSBS		
	4.0 - 6.5				10.0			SSD 54 SSBS		
	6.0 - 8.5				12.0			SSD 56 SSBS		
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0					
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
4.8 +0.08 -0.15	1.0 - 2.5	Stainless Steel	Stainless Steel	2.0	6.0	8.3 - 10.1	3.10			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0			SSD 64 SSBS		
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0					
	9.0 - 12.0				16.0			SSD 68 SSBS		
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0			SSD 610 SSBS		
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0			SSD 616 SSBS		
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					
6.4 +0.08 -0.15	1.5 - 3.0	Stainless Steel	Stainless Steel	2.7	8.0	11.6 - 13.4	4.20			
	2.0 - 4.0				10.0					
	3.0 - 6.0				12.0					
	6.0 - 8.0				14.0					
	6.0 - 10.0				16.0					
	8.0 - 12.0				18.0					
	10.0 - 14.0				20.0					
	14.0 - 18.0				25.0					
	18.0 - 23.0				30.0					
	23.0 - 28.0				35.0					
	28.0 - 33.0				40.0					

RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DH	-	K	-	2.4	-	4.0	-	6	-	ZI
Open End - Dome Head														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Open End Blind Rivet Dome Head		RVBO-DH												

Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
2.4 +0.08 -0.15	0.5 - 2.0	Steel	Steel	1.0	4.0	5.0	1.60		ZI	Steel
	2.0 - 4.0				6.0					
	4.0 - 6.0				8.0			SD 34 BS		
	6.0 - 8.0				10.0					
	7.0 - 9.5				12.0					
	8.0 - 11.5				14.0					
	10.0 - 13.0				16.0					
3.2 +0.08 -0.15	1.0 - 3.5	Steel	Steel	1.3	6.0	6.7	2.15	SD 42 BS		
	3.5 - 5.0				8.0			SD 43 BS		
	5.0 - 7.0				10.0			SD 45 BS		
	7.0 - 9.0				12.0			SD 46 BS		
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0			SD 48 BS		
	12.0 - 14.5				18.0					
4.0 +0.08 -0.15	13.0 - 16.5				20.0					
	15.0 - 21.5				25.0					
	1.0 - 3.0	Steel	Steel	1.7	6.0	8.4	2.60	SD 52 BS		
	3.0 - 5.0				8.0			SD 53 BS		
	4.0 - 6.5				10.0			SD 54 BS		
	6.0 - 8.5				12.0			SD 56 BS		
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0			SD 58 BS		
	10.0 - 14.5				18.0					
4.8 +0.08 -0.15	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
	1.0 - 2.5	Steel	Steel	2.0	6.0	10.1	3.10			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0			SD 64 BS		
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0			SD 66 BS		
	9.0 - 12.0				16.0			SD 68 BS		
	10.0 - 14.0				18.0					
6.4 +0.08 -0.15	12.0 - 16.0				20.0			SD 610 BS		
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0			SD 616 BS		
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					
6.4 +0.08 -0.15	1.5 - 3.0	Steel	Steel	2.7	8.0	13.4	4.20			
	2.0 - 4.0				10.0					
	3.0 - 6.0				12.0			SD 84 BS		
	6.0 - 8.0				14.0					
	6.0 - 10.0				16.0					
	8.0 - 12.0				18.0			SD 88 BS		
	10.0 - 14.0				20.0					
6.4 +0.08 -0.15	14.0 - 18.0				25.0			SD 812 BS		
	18.0 - 23.0				30.0			SD 816 BS		
	23.0 - 28.0				35.0					
	28.0 - 33.0				40.0					