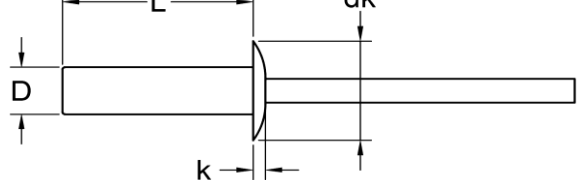
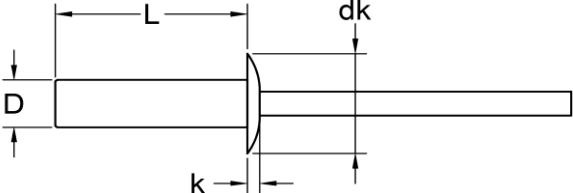


RB	RIVET BLIND	Part Number Designation												
		RVBC	-	DH	-	K	-	3.2	-	3.5	-	8	-	ALZI
Closed End - Dome Head														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Closed End Blind Rivet Dome Head		RVBC-DH												


Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	0.5 - 2.0	Aluminum	Steel	1.3	6.5	5.8 - 6.7	2.0		AL	Aluminum
	2.0 - 3.5				8.0			AD 42 H		
	3.5 - 5.0				9.5				ZI	Steel
	5.0 - 6.5				11.0			AD 44 H		
	6.5 - 8.0				12.5			AD 45 H		
4.0 +0.08 -0.15	0.5 - 3.5	Aluminum	Steel	1.7	8.0	6.9 - 8.4	2.5	AD 52 H		
	3.5 - 5.0				9.5			AD 53 H		
	5.0 - 6.5				11.0			AD 54 H		
	6.5 - 8.0				12.5			AD 55 H		
	8.0 - 12.5				15.0					
4.8 +0.08 -0.15	1.0 - 3.0	Aluminum	Steel	2.0	8.0	8.3 - 10.1	3.0	AD 62 H		
	3.0 - 5.0				9.5			AD 63 H		
	5.0 - 6.5				11.0			AD 64 H		
	6.5 - 8.0				13.0			AD 65 H		
	8.0 - 9.5				14.5			AD 66 H		
	9.5 - 11.0				16.0					
	11.0 - 13.0				18.0			AD 68 H		
	13.0 - 16.0				21.0					
6.4 +0.08 -0.15	1.5 - 6.0	Aluminum	Steel	2.7	12.5	11.6 - 13.4	3.9	AD 84 H		
	6.0 - 8.5				16.0			AD 86 H		
	8.5 - 10.5				18.0					
	10.5 - 12.5				20.0					
	12.5 - 17.5				25.0					

RB	RIVET BLIND	Part Number Designation												
		RVBC	-	DH	-	K	-	3.2	-	3.5	-	8	-	SS
Closed End - Dome Head														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Closed End Blind Rivet Dome Head		RVBC-DH												

Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	0.5 - 2.0	Stainless Steel	Stainless Steel	1.3	6.5	5.8 - 6.7	2.0		SS	Stainless Steel
	2.0 - 3.5				8.0			SSD 42 SSH		
	3.5 - 5.0				9.5			SSD 43 SSH		
	5.0 - 6.5				11.0			SSD 44 SSH		
	6.5 - 8.0				12.5			SSD 45 SSH		
4.0 +0.08 -0.15	0.5 - 3.5	Stainless Steel	Stainless Steel	1.7	8.0	6.9 - 8.4	2.5	SSD 52 SSH		
	3.5 - 5.0				9.5			SSD 53 SSH		
	5.0 - 6.5				11.0			SSD 54 SSH		
	6.5 - 8.0				12.5			SSD 55 SSH		
	8.0 - 12.5				15.0					
4.8 +0.08 -0.15	1.0 - 3.0	Stainless Steel	Stainless Steel	2.0	8.0	8.3 - 10.1	3.0	SSD 62 SSH		
	3.0 - 5.0				9.5			SSD 63 SSH		
	5.0 - 6.5				11.0			SSD 64 SSH		
	6.5 - 8.0				13.0					
	8.0 - 9.5				14.5			SSD 66 SSH		
	9.5 - 11.0				16.0					
	11.0 - 13.0				18.0			SSD 68 SSH		
	13.0 - 16.0				21.0					
	16.0 - 20.0				25.0					
6.4 +0.08 -0.15	1.5 - 6.0	Stainless Steel	Stainless Steel	2.7	12.5	11.6 - 13.4	3.9			
	6.0 - 8.5				16.0					
	8.5 - 10.5				18.0					
	10.5 - 12.5				20.0					
	12.5 - 17.5				25.0					

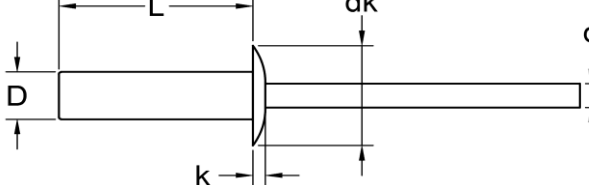RB	RIVET BLIND	Part Number Designation												
		RVBC	-	DH	-	K	-	3.2	-	3.5	-	8	-	ZI
Closed End - Dome Head														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range Max		Length		Material
Closed End Blind Rivet Dome Head		RVBC-DH												

Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	0.5 - 2.0	Steel	Steel	1.3	6.5	5.8 - 6.7	2.0		ZI	Steel
	2.0 - 3.5				8.0					
	3.5 - 5.0				9.5					
	5.0 - 6.5				11.0					
	6.5 - 8.0				12.5					
4.0 +0.08 -0.15	0.5 - 3.5	Steel	Steel	1.7	8.0	6.9 - 8.4	2.5			
	3.5 - 5.0				9.5					
	5.0 - 6.5				11.0					
	6.5 - 8.0				12.5					
	8.0 - 12.5				15.0					
4.8 +0.08 -0.15	1.0 - 3.0	Steel	Steel	2.0	8.0	8.3 - 10.1	3.0			
	3.0 - 5.0				9.5					
	5.0 - 6.5				11.0					
	6.5 - 8.0				13.0					
	8.0 - 9.5				14.5					
	9.5 - 11.0				16.0					
	11.0 - 13.0				18.0					
	13.0 - 16.0				21.0					
6.4 +0.08 -0.15	1.5 - 6.0	Steel	Steel	2.7	12.5	11.6 - 13.4	3.9			
	6.0 - 8.5				16.0					
	8.5 - 10.5				18.0					
	10.5 - 12.5				20.0					
	12.5 - 17.5				25.0					