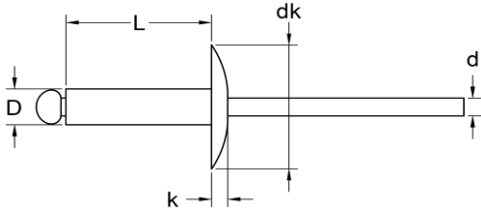
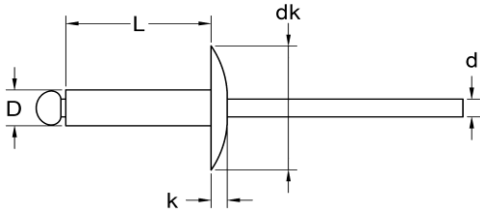


RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DHF	-	K	-	3.2	-	3.5	-	6	-	ALZI
Open End - Dome Head - Large														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range		Length		Material
Open End Blind Rivet Dome Head Large		RVBO-DHF												


Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	1.0 - 3.5	Aluminum	Steel	2.00	6.0	9.5	2.00	AD 42 BS LF	AL	Aluminum
	3.5 - 5.0				8.0			AD 43 BS LF		
	5.0 - 7.0				10.0				ZI	Steel
	7.0 - 9.0				12.0			AD 46 BS LF		
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0					
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
	15.0 - 21.0				25.0					
4.0 +0.08 -0.15	1.0 - 3.0	Aluminum	Steel	2.2	6.0	12	2.45			
	3.0 - 5.0				8.0					
	4.0 - 6.5				10.0			AD 54 BS LF		
	6.0 - 8.5				12.0					
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0					
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
4.8 +0.08 -0.15	1.0 - 2.5	Aluminum	Steel	3.2	6.0	16	2.95			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0			AD 64 BS LF		
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0			AD 66 BS LF		
	8.0 - 12.0				16.0					
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0			AD 610 BS LF		
	16.0 - 21.0				25.0			AD 614 BS LF		
	21.0 - 25.0				30.0			AD 616 BS LF		
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					

RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DHF	-	K	-	3.2	-	3.5	-	6	-	SS
Open End - Dome Head - Large														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range		Length		Material
Open End Blind Rivet Dome Head Large		RVBO-DHF												

Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	1.0 - 3.5	Stainless Steel	Stainless Steel	2.0	6.0	9.5	2.10	SSD 42 SSBS LF	SS	Stainless Steel
	3.5 - 5.0				8.0			SSD 43 SSBS LF		
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0					
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0					
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
	15.0 - 21.5				25.0					
4.0 +0.08 -0.15	1.0 - 3.0	Stainless Steel	Stainless Steel	2.2	6.0	12	2.6			
	3.0 - 5.0				8.0					
	4.0 - 6.5				10.0					
	6.0 - 8.5				12.0					
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0					
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
4.8 +0.08 -0.15	1.0 - 2.5	Stainless Steel	Stainless Steel	2.5	6.0	16	3.10			
	2.5 - 4.0				8.0					
	4.0 - 6.0				10.0			SSD 64 SSBS LF		
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0			SSD 66 SSBS LF		
	9.0 - 12.0				16.0			SSD 68 SSBS LF		
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0			SSD 610 SSBS LF		
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0					
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					

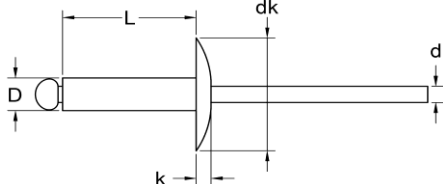RB	RIVET BLIND	Part Number Designation												
		RVBO	-	DHF	-	K	-	3.2	-	3.5	-	6	-	ZI
Open End - Dome Head - Large														
		Rivet Blind		Head Type		Knurled		Body Diameter		Grip Range		Length		Material
Open End Blind Rivet Dome Head Large		RVBO-DHF												

Unit: mm

D	Grip Range (Min - Max)	Material		k	L +1/-0	dk	d	Equivalent PN	Material	
		Body	Mandrel						Symbol	Stand for
3.2 +0.08 -0.15	1.0 - 3.5	Steel	Steel	2.0	6.0	9.5	2.10	SD 42 BS LF	ZI	Steel
	3.5 - 5.0				8.0			SD 43 BS LF		
	5.0 - 7.0				10.0					
	7.0 - 9.0				12.0			SD 46 BS LF		
	9.0 - 11.0				14.0					
	9.0 - 12.5				16.0					
	12.0 - 14.5				18.0					
	13.0 - 16.5				20.0					
	15.0 - 21.5				25.0					
	1.0 - 3.0				6.0					
	3.0 - 5.0				8.0			SD 53 BS LF		
4.0 +0.08 -0.15	4.0 - 6.5	Steel	Steel	2.2	10.0	12	2.60	SD 54 BS LF		
	6.0 - 8.5				12.0					
	7.0 - 10.5				14.0					
	8.0 - 12.5				16.0					
	10.0 - 14.5				18.0					
	12.0 - 16.0				20.0					
	16.0 - 21.0				25.0					
	21.0 - 26.0				30.0					
	26.0 - 30.5				35.0					
	30.5 - 35.0				40.0					
	1.0 - 2.5				6.0					
4.8 +0.08 -0.15	2.5 - 4.0	Steel	Steel	2.5	8.0	16	3.10			
	4.0 - 6.0				10.0			SD 64 BS LF		
	6.0 - 8.0				12.0					
	8.0 - 10.0				14.0			SD 66 BS LF		
	9.0 - 12.0				16.0			SD 68 BS LF		
	10.0 - 14.0				18.0					
	12.0 - 16.0				20.0			SD 610 BS LF		
	16.0 - 21.0				25.0					
	21.0 - 25.0				30.0					
	25.0 - 30.0				35.0					
	30.0 - 35.0				40.0					
	35.0 - 40.0				45.0					
	40.0 - 45.0				50.0					