



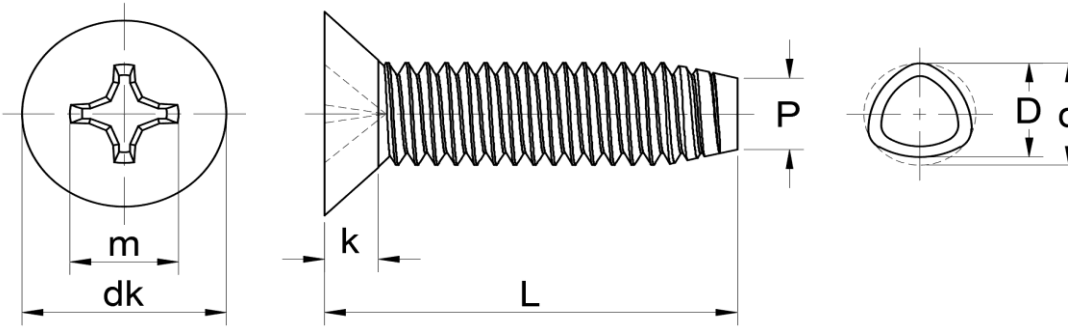


TS	TAPPING SCREW	Part Number Designation							
		TSTR3F-H	-	M3	-	6,0	-	SS	
TSTR	TAPPING SCREW - THREAD ROLLING	 Type	 Thread Code	 Length	 Material				
DIN7500 M Metric Phillips Flat Countersunk Thread Rolling Screws		TSTR3F-H							

Unit: mm

Thread size	Thread code (d)	Type Phillips Flat Head Thread Rolling TSTR3F-H	Head							Material		
			Head Diameter (dk)	Head Height (k) max	Recess Diameter (m)	Diameter of Circumscribing Circle (d)	Major Thread Diameter (D)	Point Diameter (P)	Symbol	Stand for		
M2x0.4	M2	TSTR3F-H	3.50 - 3.80	1.20	2.2	1.98 - 2.06	1.90 - 1.98	1.67	SS	304/A2/18-8 Stainless Steel		
M2.5x0.45	M2.5		4.40 - 4.70	1.50	2.5	2.47 - 2.55	2.38 - 2.48	2.11				
M3x0.5	M3		5.30 - 5.60	1.65	2.8	2.97 - 3.05	2.87 - 2.95	2.57	Zl	Zinc Plated Steel		
M4x0.7	M4		7.14 - 7.50	2.20	4.0	3.99 - 4.07	3.85 - 3.93	3.39				
M5x0.8	M5		8.84 - 9.20	2.50	4.4	5.00 - 5.08	4.84 - 4.92	4.30				
M6x1	M6		10.57 - 11.00	3.00	6.1	5.97 - 6.10	5.77 - 5.90	5.13				
Length (L)	3	4	5	6	8	10	12	14	16	18		
	20	22	25	30	35	40	45	50	55	60		
	70	80										
Tolerance on Length	3-6mm: ±0.375			over 6-10mm: ±0.45			over 10-18mm: ±0.55			VXA010624		
	over 18-30mm: ±0.65			over 30-50mm: ±0.80			over 50-80mm: ±0.95					