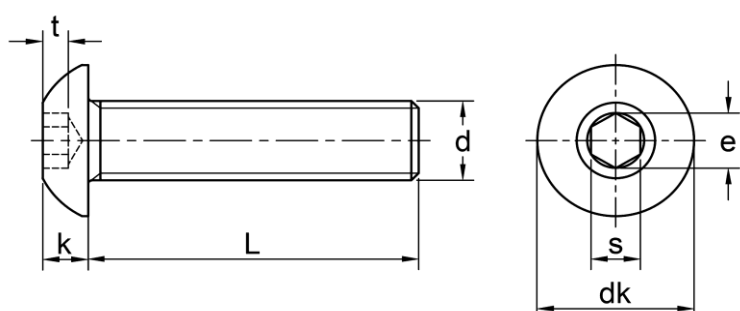


CS	CAP SCREW	Part Number Designation			
		CSBS ↓ Type	- M3 ↓ Thread Code	- 6.0 ↓ Length	- SS ↓ Material
CSBS	CAP SCREW - BUTTON SOCKET HEAD				
ISO 7380 Hexagonal Button Socket Head Cap Screws		CSBS			

Unit: mm

Thread size	Thread code (d)	Type ISO 7380 Button Socket	Head					Material	
			Diameter (dk)	Height (k)	Drive size (e)	Drive size (s) ref	Depth (t) min	Symbol	Stand for
M3x0.5	M3	CSBS	5.40 - 5.70	1.40 - 1.65	2,303	2.0	1.04	SS	304/A2/18-8 Stainless Steel
M4x0.7	M4		7.24 - 7.60	1.95 - 2.20	2,873	2.5	1.30		
M5x0.8	M5		9.14 - 9.50	2.50 - 2.75	3,443	3.0	1.56	SCR	316/A4 Stainless Steel
M6x1.0	M6		10.07 - 10.50	3.00 - 3.30	4,583	4.0	2.08		
M8x1.25	M8		13.57 - 14.00	4.10 - 4.40	5,723	5.0	2.60	ZI10	Class 10 Steel Zinc Plated
M10x1.5	M10		17.07 - 17.50	5.20 - 5.50	6,863	6.0	3.12		
M12x1.75	M12		20.48 - 21.00	6.24 - 6.60	9,149	8.0	4.16	ZI10B	Class 10 Steel Black Zinc Plated
M16x2.0	M16		27.48 - 28.00	8.44 - 8.80	11,429	10.0	5.20		
Length (L)	6.0 ± 0.24	8.0 ± 0.29	10.0 ± 0.29	12.0 ± 0.35	16.0 ± 0.35	20.0 ± 0.42	25.0 ± 0.42		VXA010624
	30.0 ± 0.42	35.0 ± 0.5	40.0 ± 0.5	45.0 ± 0.5	50.0 ± 0.5	55.0 ± 0.6	60.0 ± 0.6		
	65.0 ± 0.6	70.0 ± 0.6	80.0 ± 0.6	90.0 ± 0.7	100.0 ± 0.7			