


CS	CAP SCREW	Part Number Designation			
		CSHS-TS-F ↓ Type	- M3 ↓ Thread Code	- 6.0 ↓ Length	- SS ↓ Material
CSHS-TS	CAP SCREW - HEXAGON SOCKET - THIN				

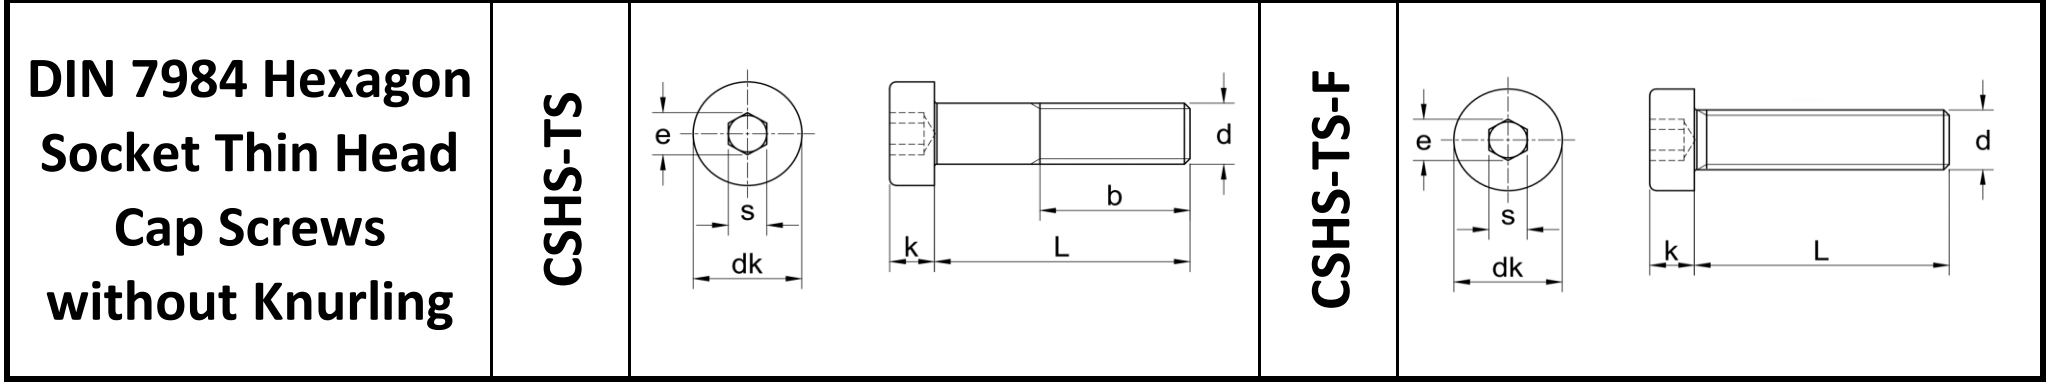

Unit: mm

Thread size	Thread code (d)	Type		Head						Material		
		Part of thread	Full thread	Head Diameter (dk)	Head Height (k)	Threaded Length (b)			Across The Flats (s)	Across The Corners (e)	Symbol	Stand for
						L≤125	125≤L≤200	L>200				
M3x0.5	M3	CSHS-TS	CSHS-TS-F	5.32-5.50	1.86-2.00	12	-	-	2.0	2.30	SS	304/A2/18-8 Stainless Steel
M4x0.7	M4			6.78-7.00	2.66-2.80	14	-	-	2.5	2.87		
M5x0.8	M5			8.28-8.50	3.32-3.50	16	-	-	3.0	3.44	Zl8B	Class 8 Steel Black Zinc Plated
M6x1	M6			9.78-10.00	3.82-4.00	18	-	-	4.0	4.58		
M8x1.25	M8			12.73-13.00	4.82-5.00	22	28	-	5.0	5.72		
M10x1.5	M10			15.73-16.00	5.82-6.00	26	32	-	7.0	8.01		
M12x1.75	M12			17.73-18.00	6.78-7.00	30	36	-	8.0	9.15		
M14x2	M14			20.67-21.00	7.78-8.00	34	40	-	10.0	11.43		
M16x2	M16			23.67-24.00	8.78-9.00	38	44	57	12.0	13.72		
Length (L)	5±0.24	6±0.24	8±0.29	10±0.29	12±0.35	14±0.35	16±0.35					
	18±0.35	20±0.42	25±0.42	30±0.42	35±0.50	40±0.50	45±0.50					
	50±0.50	55±0.60	60±0.60	70±0.60	80±0.60	90±0.70	100±0.70	VXA010624				