



PLASTIC CAPTIVE PANEL SCREWS

Ốc vít bằng điện Plastic Caps Captive Panel Screws

PF11PM

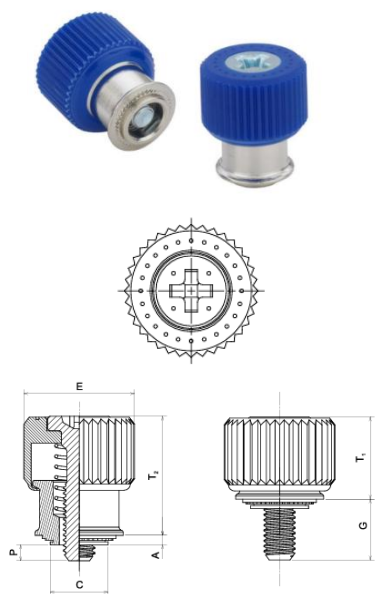

Part Number Designation										
PF11	-	P	-	M	-	632	-	0	-	U
↓		↓		↓		↓		↓		↓
Type		Anti-cross Thread Feature		Flare mounted Style		Thread code		Screw Length code		Color Code

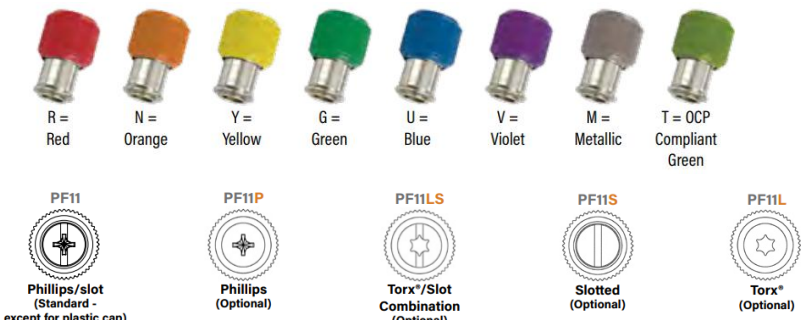

ALL DIMENSION ARE IN INCHES

UNIFIED	Thread Size	TYPE Knurled Cap	Thread Code	Shank Code	A (Shank) Max.	Min. Sheet Thick-ness	Hole Size in Sheet +.003 -.000	C Max.	E ±.010	G ±.025	P ±.025	T1 Nom.	T2 Nom.	Driver Size	Min. Dist. Hole C/L To Edge
	.112-40 (#4-40)	PF11PM	440	0	.036	.036	.219	.218	.417	.170	.000	.310	.450	#2	.28
				1						.230	.060				
				2						.290	.120				
	.138-32 (#6-32)	PF11PM	632	0	.036	.036	.250	.249	.450	.230	.000	.450	.640	#2	.29
				1						.290	.060				
				2						.350	.120				
	.164-32 (#8-32)	PF11PM	832	0	.036	.036	.312	.311	.514	.230	.000	.450	.640	#2	.33
				1						.290	.060				
				2						.350	.120				
	.190-32 (#10-32)	PF11PM	032	0	.036	.036	.312	.311	.514	.230	.000	.450	.640	#2	.33
				1						.290	.060				
				2						.350	.120				

ALL DIMENSION ARE IN MILLIMETERS

METRIC	Thread Size x Pitch	TYPE Knurled Cap	Thread Code	Shank Code	A (Shank) Max.	Min. Sheet Thick-ness	Hole Size in Sheet +0.08	C Max.	E ±0.25	G ±0.64	P ±0.64	T1 Nom.	T2 Nom.	Driver Size	Min. Dist. Hole C/L To Edge
	M3x0.5	PF11PM	M3	0	0.92	0.92	5.56	5.54	10.59	4.32	0	7.87	11.43	#2	7.11
				1						5.84	1.52				
				2						7.37	3.05				
	M3.5x0.6	PF11PM	M3.5	0	0.92	0.92	6.35	6.33	11.43	5.84	0	11.43	16.26	#2	7.37
				1						7.37	1.52				
				2						8.89	3.05				
	M4x0.7	PF11PM	M4	0	0.92	0.92	7.92	7.9	13.06	5.84	0	11.43	16.26	#2	8.38
				1						7.37	1.52				
				2						8.89	3.05				
	M5x0.8	PF11PM	M5	0	0.92	0.92	7.92	7.9	13.06	5.84	0	11.43	16.26	#2	8.38
				1						7.37	1.52				