


RECESSED-HEAD CAPTIVE PANEL SCREWS

Ốc vít bằng điện Recessed-Head Captive Panel Screws

PFC2P

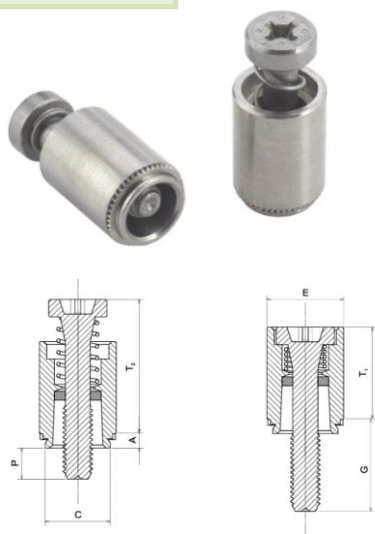

Part Number Designation		
PFC2P	832	50
↓	↓	↓
Type and Material	Thread Size Code	Screw Length Code

ALL DIMENSION ARE IN MILLIMETERS

METRIC	Thread Size	Type	Thread code	Screw Length Code	A (Shank) Max.	Min sheet Think	Hole size In Sheet +0.08	C Max.	E ±0.25	G ±0.4	P ±0.64	T1 Nom	T2 Nom	Driver Size	Min. Dist. Hole C/L To Edge
	M3x0.5	PFC2P	M3	40	1.53	1.53	6.73	6.71	7.92	6.4	0	9.4	13.72	#1	6.35
				62						9.5	3.2				
	M4x0.7	PFC2P	M4	50	1.53	1.53	7.92	7.9	9.53	7.9	0	12.19	17.91	#2	7.87
				72						11.1	3.2				
				94						14.3	6.4				
	M5x0.8	PFC2P	M5	50	1.53	1.53	8.74	8.72	10.31	7.9	0	12.45	17.91	#2	8.63
				72						11.1	3.2				
				94						14.3	6.4				
	M6x1	PFC2P	M6	60	1.53	1.53	10.49	10.47	11.89	9.5	0	15.75	22.99	#3	9.65
				82						12.7	3.2				
				04						15.9	6.4				

ALL DIMENSION ARE IN INCHES

UNIFIED	Thread Size	Type	Thread code	Screw Length Code	A (Shank) Max.	Min sheet Think	Hole size In Sheet +.003 -.000	C Max.	E ±.010	G ±.016	P ±.025	T1 Nom	T2 Nom	Driver Size	Min. Dist. Hole C/L To Edge
	.112-40 (#4-40)	PFC2P	440	40	.060	.060	.265	.264	.312	.250	.000	.370	.540	#1	.250
				62						.375	.125				
	.138-32 (#6-32)	PFC2P	632	40	.060	.060	.281	.280	.344	.250	.000	.380	.540	#2	.280
				62						.375	.125				
				84						.500	.250				
	.164-32 (#8-32)	PFC2P	832	50	.060	.060	.312	.311	.375	.312	.000	.480	.705	#2	.310
				72						.437	.125				
				94						.562	.250				
	.190-32 (#10-32)	PFC2P	032	50	.060	.060	.344	.343	.406	.312	.000	.490	.705	#2	.340
				72						.437	.125				
				94						.562	.250				
	.250-20 (1/4-20)	PFC2P	0420	60	.060	.060	.413	.412	.468	.375	.000	.620	.905	#3	.380
				82						.500	.125				
				04						.625	.250				