


SCREW HEAD BROACHING CAPTIVE PANEL SCREWS

Ốc vít bằng điện Screw Head Broaching Captive Panel Screws

PFK

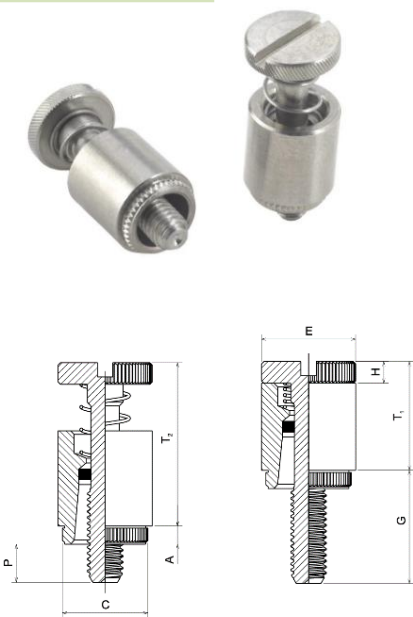

Part Number Designation		
PFK	M3	40
↓	↓	↓
Type	Thread code	Screw length code

ALL DIMENSION ARE IN MILLIMETERS

UNIFIED	Thread Size	Type	Thread code	Screw Length code	A Max	Min Sheet Thick-ness	Hole size in sheet +.003-.000	C ±.003	E ±.010	G ±.016	H ±.005	P ±.025	T1 Max.	T2 Nom.	Min. Dist. Hole C/L To Edge
	.112-40 (#4-40)	PFK	440	40	.060	.060	.265	.283	.312	.250	.072	.000	.36	.54	.20
				62						.375		.125			
				84						.500		.250			
	.138-32 (#6-32)	PFK	632	40	.060	.060	.281	.293	.344	.250	.072	.000	.36	.54	.26
				62						.375		.125			
				84						.500		.250			

ALL DIMENSION ARE IN INCHS

METRIC	Thread Size	Type	Thread code	Screw Length code	A Max	Min Sheet Thick-ness	Hole size in sheet +0.08	C ±0.08	E ±0.25	G ±0.4	H ±0.13	P ±0.64	T1 Max.	T2 Nom.	Min. Dist. Hole C/L To Edge
	M3x0.5	PFK	M3	40	1.53	1.53	6.73	7.19	7.92	6.4	1.83	0	9.14	13.72	5.08
				62						9.5		3.2			
				84						12.7		6.4			