



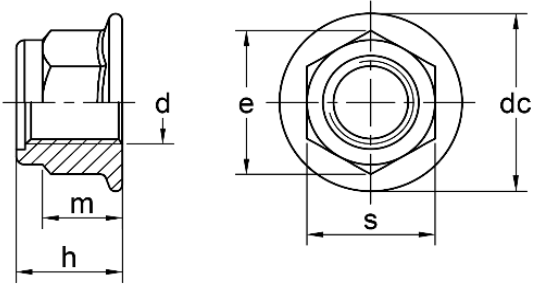


<b>N</b>	<b>NUT</b>	<b>Part Number Designation</b>				
		<b>NLNF-D6926</b>	<b>-</b>	<b>M5</b>	<b>-</b>	<b>SS</b>
<b>NLNF-D6926</b>	<b>NUT - NYLON LOCK FLANGE - DIN6926</b>					
		<b>Type</b>	<b>Thread Code</b>	<b>Nut Material</b>	<b>Insert Material</b>	
<b>Metric DIN6926 Hexagon Nylon Lock Nut with Flange</b>			<b>NLNF-D6926</b>			

Unit: mm

Thread Size (d)	Code	Thread Size (d)	Code	Type	Width Across Flats (s)	Width Across Corners (min) (e)	Flange Diameter (max) (dc)	Height (min) (m)	Thickness (h)	Nut Material	
				Non-Serrated						Symbol	Stand for
M5x0.8	M5	-	-	<b>NLNF-D6926</b>	7.78 - 8.00	8.79	11.80	4.7	6.74 - 7.10	SS	304/A2/18-8 Stainless Steel
M6x1.0	M6	-	-		9.78 - 10.00	11.05	14.20	5.7	8.74 - 9.10		
M8x1.25	M8	M8x1.0	M8-1.0		12.73 - 13.00	14.38	17.90	7.6	10.67 - 11.10	SCR	316/A4 Stainless Steel
M10x1.5	M10	M10x1.0	M10-1.0		14.73 - 15.00	16.64	21.80	9.6	13.07 - 13.50		
		M10x1.25	M10-1.25								
M12x1.75	M12	M12x1.25	M12-1.25		17.73 - 18.00	20.03	26.00	11.6	15.67 - 16.10	ZI8	Class 8 Steel zinc plated
		M12x1.5	M12-1.5								
M14x2.0	M14	M14x1.5	M14-1.5		20.67 - 21.00	23.36	29.90	13.3	17.68 - 18.20	ZI10	Class 10 Steel zinc plated
M16x2.0	M16	M16x1.5	M16-1.5	23.67 - 24.00	26.75	34.50	15.3	19.46 - 20.30			
										<b>Insert Material</b>	
										PA	Polyamid
<b>VXA010623</b>											