



CONCEALED HEAD STUDS

Trụ ren trụ giử Concealed Head Studs

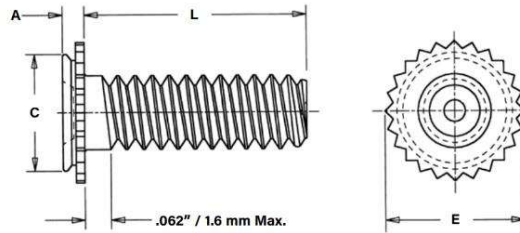

Part Number Designation			
CH	A	632	6
↓	↓	↓	↓
Type	Material	Thread code	Length code



ALL DIMENSION ARE IN MILLIMETERS

METRIC	Thread Size x Pitch	Type		Thread Code	Length Code "L" ±0.4 (Length code in millimeters)							Min Sheet Thickness	Blind Mounting Hole Dia. +0.08	Min. Depth of Blind Hole	A (Shank) Max.	E ±0.25	C Max.	Min. Dist. Hole C/L To Edge	Max. Hole In Attached Parts
		Fastener Material			6	8	10	12	16	20	/								
		Aluminum	Stainless Steel																
M3x0.5	CHA	CHC	M3	6	8	10	12	16	20	/	1.6	4.37	1.1	1.04	5.21	4.35	4	3.6	
	CFHA	CFHC									2.4		1.91	1.8					
M4x0.7	CHA	CHC	M4	6	8	10	12	16	20	25	1.6	7.37	1.1	1.04	8.33	7.35	5.6	4.6	
	CFHA	CFHC									2.4		1.91	1.8					
M5x0.8	CHA	CHC	M5	/	8	10	12	16	20	25	1.6	7.93	1.1	1.04	8.89	7.9	6.4	5.6	
	CFHA	CFHC									2.4		1.91	1.8					

ALL DIMENSION ARE IN INCHES

UNIFIED	Thread Size	Type		Thread Code	Length Code "L" ±.015 (Length code is in 16ths of an inch)						Min Sheet Thickness	Blind Mounting Hole Dia. +.003 -.000	Min. Depth of Blind Hole	A (Shank) Max.	E ±.010	C Max.	Min. Dist. Hole C/L To Edge	Max. Hole In Attached Parts
		Fastener Material			.250	.375	.500	.625	.750	1.00								
		Aluminum	Stainless Steel															
.112-40 (#4-40)	CHA	CHC	440	4	6	8	10	12	/	.062	.172	.043	.041	.205	.171	.156	.135	
	CFHA	CFHC								.093		.075	.071					
.138-32 (#6-32)	CHA	CHC	632	4	6	8	10	12	16	.062	.213	.043	.041	.250	.212	.188	.160	
	CFHA	CFHC								.093		.075	.071					
.164-32 (#8-32)	CHA	CHC	832	4	6	8	10	12	16	.062	.290	.043	.041	.328	.289	.219	.185	
	CFHA	CFHC								.093		.075	.071					
.190-32 (#10-32)	CHA	CHC	032	/	6	8	10	12	16	.062	.312	.043	.041	.350	.311	.250	.210	
	CFHA	CFHC								.093		.075	.071					