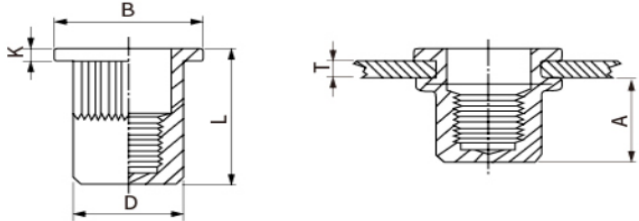


RN	Rivet Nut	Part Number Designation										
RVNC	Rivet Nut - Closed	RVNC	-	R	-	M3	-	1.5	-	13.0	-	SS
		↓		↓		↓		↓		↓		↓
		Rivet Pin		Type		Thread Code		Grip Range Max		Length		Material
Flat Head Knurled Body Closed End		RVNC-R										

Unit: mm

Thread	P/N		T (Grip Range) Min - Max	A Rer	Hole size +0.1 0	D +0.07 -0.1	B	K	L	Material	
	Steel	Stainless Steel								Symbol	Stand for
M3	-	SS	0.5 - 1.5	8.0	6.0	5.9	8.0	0.8	13.0	ZI	Steel Zinc Plated
M4	ZI	-	0.5 - 2.0	11.3	6.0	5.9	9.0	0.8	16.0	SS	Stainless Steel
	ZI	-	2.0 - 4.0	11.3	6.0	5.9	9.0	0.8	18.0		
	-	SS	0.5 - 2.0	11.8	6.0	5.9	9.0	0.9	17.0		
M5	-	SS	2.0 - 4.0	11.8	6.0	5.9	9.0	0.9	19.0		
	ZI	-	0.5 - 2.5	11.5	7.0	6.9	10.0	1.0	17.0		
	ZI	-	2.5 - 4.5	11.5	7.0	6.9	10.0	1.0	19.0		
M6	-	SS	0.5 - 2.5	12.0	7.0	6.9	10.0	0.9	19.0		
	-	SS	2.0 - 4.0	12.0	7.0	6.9	10.0	0.9	20.5		
	ZI	-	0.5 - 3.0	13.0	9.0	8.9	12.3	1.3	19.2		
M8	ZI	-	3.0 - 5.0	13.0	9.0	8.9	12.3	1.3	21.0		
	-	SS	0.5 - 3.0	12.7	9.0	8.9	12.3	1.3	19.2		
	-	SS	3.0 - 5.0	12.7	9.0	8.9	12.3	1.3	21.0		
M10	-	SS	0.5 - 3.0	17.0	9.0	8.9	12.3	1.3	23.5		
	ZI	-	0.5 - 3.0	14.8	11.0	10.9	15.0	1.5	21.5		
	ZI	-	3.0 - 5.5	14.8	11.0	10.9	15.0	1.5	24.0		
M12	-	SS	1.0 - 3.5	14.2	11.0	10.9	14.5(15.0)	1.5	21.5		
	-	SS	3.5 - 5.5	14.8	11.0	10.9	14.5(15.0)	1.5	24.0		
	ZI	-	1.0 - 4.0	19.2	13.0	12.9	17.0	1.6	27.0		
M12	ZI	-	3.5 - 6.0	22.0	13.0	12.9	17.0	1.6	32.5		
	-	SS	1.0 - 4.0	18.0	13.0	12.9	17.0	1.7	27.0		
	-	SS	4.0 - 6.0	19.2	13.0	12.9	17.0	1.7	30.0		
M12	-	SS	1.0 - 4.0	29.5	16.0	15.9	23.0	2.0	30.0		
	-	SS	4.0 - 6.0	29.5	16.0	15.9	23.0	2.0	33.0		